Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 111691

1003-09 P T B T S
1 2 3 4 5 6

1	NO. OF PINS	:	9, 15, 19, 23, 25, 37, 50
2	CONTACT TYPE	:	P-Male S-Female
3	SHELL PLATED	:	T-Tin shell Z-Zinc shell
4	INSULATOR COLOR	:	B-blue K-black W-white
5	MOUNTING TYPE	:	T - Through hole type
			N - with UNC#4-40 nut type
6	CONTACT PLATED	:	S - Tin plated on terminal & gold plated on contact
			G - All gold plated

FEMALE

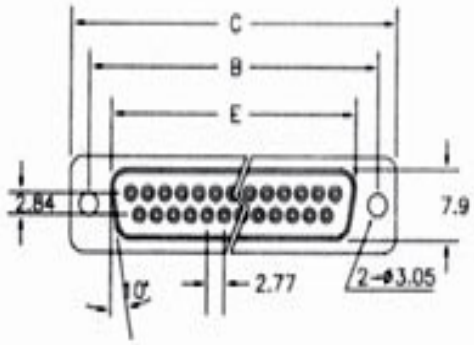

MALE

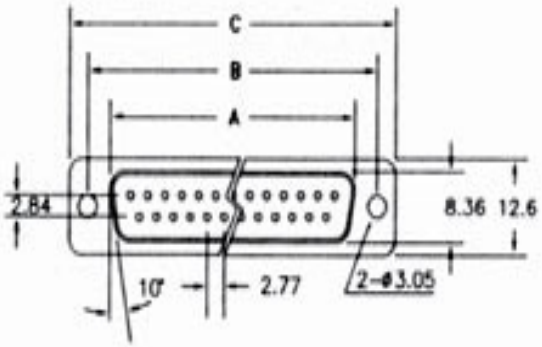

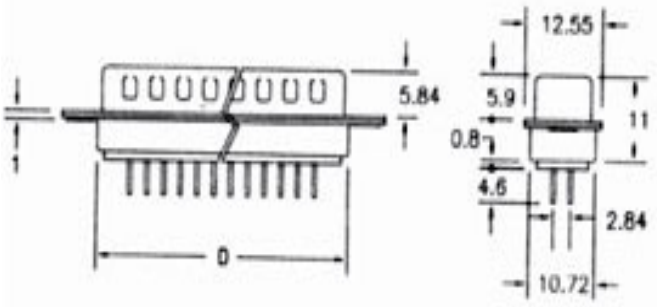

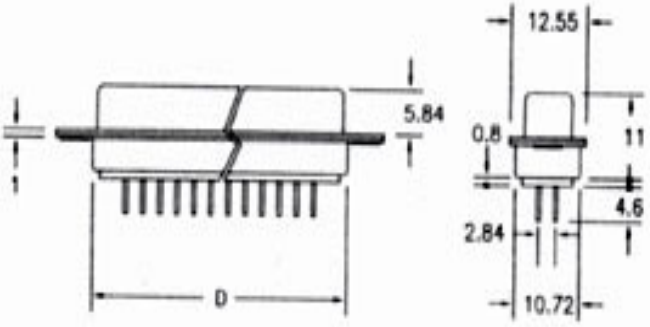

D-SUB DIP STRAIGHT TYPE

Specifications:

Contact Resistance: 30mΩmax. at DC 100mA
Insulator Resistance: 1000MΩmin. at DC 500V
Current Rating: 5 AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
Operating Temperature: -55°C~+105°C
Contact: Brass or Phosphor Bronze
Housing: PBT & 30% Glass Fiber (UL 94V-O)

Dimension

Position	A	B	C	D	E
9	16.92	24.99	30.81	19.28	16.33
15	25.25	33.62	39.14	27.51	24.66
19	32.90	39.03	44.80	33.02	29.92
23	38.50	44.36	50.30	38.15	35.18
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.71	54.84
50	52.86	61.11	66.90	55.30	52.34